

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 018 700 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.07.2000 Bulletin 2000/28

(51) Int. Cl.⁷: G06K 9/62

(21) Application number: 00100150.2

(22) Date of filing: 10.01.2000

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 08.01.1999 JP 243799

(71) Applicant: OMRON CORPORATION

Kyoto-shi, Kyoto 616-8025 (JP)

(72) Inventors:

• Kakiuchi, Takashi

Ukyo-ku, Kyoto 616 (JP)

• Hiraishi, Junji

Ukyo-ku, Kyoto 616 (JP)

• Taniguchi, Keitaro

Ukyo-ku, Kyoto 616 (JP)

• Kagatani, Tomoji

Ukyo-ku, Kyoto 616 (JP)

(74) Representative:

Kahler, Kurt, Dipl.-Ing.

Patentanwälte

Kahler, Käck, Fiener et col.,

Vorderer Anger 268


86899 Landsberg/Lech (DE)

(54) An image recognition device using pattern elements

(57) A image recognition device using pattern elements is disclosed. The device comprises an image recognition device, a recording medium, and an image processing device which is be capable of executing recognition processing accurately and evaluating an input image even when the input image data is a different size because the input image has been magnified or reduced. To achieve the objectives, the image recognition device of this invention has a pattern element recognizing means to recognize the pattern elements

obtained by dividing the input image into a plurality of regions which are compared with corresponding target pattern elements, and a pattern detection means to detect the relative position of the pattern elements, which determines whether the pattern elements detected by the aforesaid pattern element recognizing means are arranged properly with respect to each other.

FIGURE 1

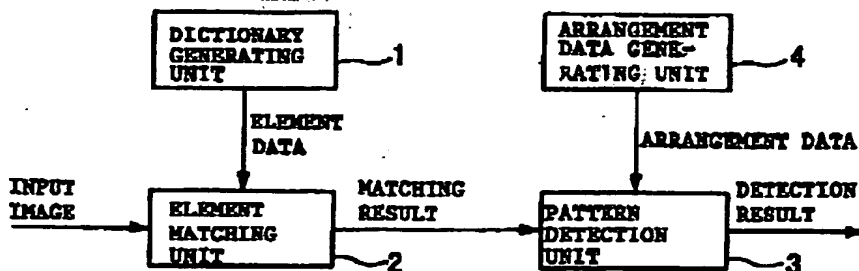

EP 1 018 700 A2

Description

BACKGROUND OF THE INVENTION

I. FIELD OF THE INVENTION

[0001] This invention generally relates to a device and method to prevent the counterfeiting of paper money, stock certificates, or similar documents. More specifically, it relates to an image recognition device which is capable of recognizing a specific input image even though the input image has been enlarged or reduced in size.

II. DESCRIPTION OF THE RELATED ART

[0002] In recent years, the capabilities of full-color copy machines have become so sophisticated that it is often impossible to distinguish a copy from the original image with the naked eye. At the same time, such copying machines have become readily available. Thus, there is an increased danger that copiers will be misused to counterfeit documents, which may not legally be reproduced, such as banknotes and stock certificates. Various devices have been developed to prevent such counterfeiting.

[0003] Some of these devices pre-record a specific image of a banknote or other document, which may not be legally reproduced. Then, these devices determine whether the pre-recorded specific image exists in an input image which someone is attempting to copy. The method used to determine whether the image is recognized (i.e., pattern matching) entails evaluating the input image's distance from the template, or the relative correlation between a target pattern (the template) and the input image the device is attempting to recognize (the object of recognition).

[0004] If the device does recognize the target pattern in the input image, it employs any of various means to prevent copying, such as covering the paper entirely with black ink or halting the process.

[0005] Size is an essential element used in the technique described above. The size evaluation consists of determining if the input image and target pattern are exactly the same size. The input image and the target pattern must be the same size for the device to prevent copying. If the shapes in the two images are the same (i.e., the figures are similar) but their dimensions are different, the device will not recognize the input image as identical to the target pattern. As a result, if someone were to use the copier's zoom function to reduce or enlarge the input image to be copied, the size of the input image data, which the image recognition device received from the copier, would not match the target pattern stored in the device, and the device would conclude that the input image was not one for which copying should be prohibited.

[0006] A digital color copier normally reads the

image loaded on the glass by moving an image sensor with one line of CCD (in the scanning direction) at a given speed. If the input image has been reduced or enlarged, the speed of the image sensor can be increased or decreased respectively. This is necessary because the quantity of data in the feed direction, which is received per unit of time, will differ with magnification.

[0007] It is understood that humans recognize shapes by a complex process. However, human are not as skilled in evaluating size. In fact, recognizing (or discriminating) small differences in size is difficult for most people. An item which is successfully copied because the image recognition device does not recognize the input image as the same size as the reference image may nevertheless be indistinguishable to the human eye.

[0008] If the magnification (either enlargement or reduction) is ten percent or more, anyone can easily recognize a copy by comparing it directly with the original bill or document and seeing that it is the wrong size; but seeing only the copy makes it much more difficult. Furthermore, if it is a bill which a person seldom sees, foreign currency for example, the task is even harder.

[0009] To address this problem, the image processing device disclosed in Japanese Patent Publication 6-237379 was developed. During preprocessing, this invention extracts a specified portion (which varies with the magnification) of the input image data based on the magnification it receives from the copier. This process makes the resolution of the extracted image data fixed at any magnification or zoom level. In this way the same processing can be executed in every subsequent unit without regard to the magnification, so that the likelihood of recognition will not vary with magnification.

[0010] The prior art device described above is effective for machines such as copiers which can transmit magnification or zoom data to it, but it cannot be used for machines which are unable to provide accurate magnification data. For example, an image processing system which consists of a scanner, a personal computer and a printer, inputs processes and reproduces the image by itself. This makes it difficult to obtain the sort of reliable index of magnification which a copier can readily provide. Thus, the recognition processing employing magnification disclosed in the Japanese Patent Publication 6-237379 cannot be applied to this sort of image processing system.

[0011] The rapid development of electronic technology has improved the resolution of all the devices discussed above and enabled accurate full color printing. For this reason we must have a reliable way to halt the reproduction of images containing specified target patterns.

SUMMARY OF THE INVENTION

[0012] The present invention provides an image recognition device, a recording medium, and an image

processing device which are capable of executing recognition processing accurately and evaluating the input image even when the input image data and target pattern are different sizes due to magnification or reduction.

[0013] The preferred embodiment of this invention has a pattern element recognizing means to recognize the pattern elements obtained by dividing an input image into a plurality of regions which are compared with corresponding target pattern elements, and a pattern detection means to detect the relative position of the pattern elements, which determines whether the pattern elements detected by the aforesaid pattern element recognizing means are arranged properly with respect to each other.

[0014] In another embodiment of the present invention, the device has a dictionary generating unit which stores dictionary data for each pattern element in the reference image; an element matching unit, which compares and matches the input image pattern data against the target pattern data stored in the aforesaid dictionary unit; a storage unit for arrangement data (corresponding to "arrangement data generating unit 4"), which stores data representing the arrangement of the aforesaid pattern elements; and a pattern detection unit, which based on the output of the aforesaid element matching unit, determines whether the target pattern can be found in the aforesaid input image data.

[0015] The image processing device of this invention executes specified image recognition processing on the input image data. After recognizing a match between the target pattern and the input image data being subject to the aforesaid processing, by one of the above methods, this device prevents the normal image processing from occurring. In the preferred embodiment, this image processing device is realized by a personal computer 12. Any device other than a personal computer 12 which executes various image processing routines would also be considered an image processing device for the purpose of this invention, naturally including a copy machine. If used with an image processing device, such as a copier, which is capable of providing a magnification value, the device may employ the magnification value to establish the arrangement data which will serve as the basis for comparison, or it may establish the arrangement data without resorting to the magnification data from the copier.

[0016] The recording medium of this invention contains an image recognition program which sends commands to the computer to execute processing to match the input image data received against the dictionary data for each element in the pattern and processing to determine whether the arrangement of the pattern elements detected by the aforesaid matching indicates the existence of the aforesaid pattern.

[0017] The target pattern (i.e., dictionary data) used to recognize the specified image consists of pattern elements obtained by dividing the pattern into a number of

regions. The specified image is recognized by marching the input image data against the dictionary data. By executing image recognition independently for a number of regions consisting of a small quantity of data (i.e., the pattern elements), we can minimize the effect of the discrepancy which shows up in each region due to the change in scale when the input image has been magnified or reduced.

[0018] If recognition is attempted using an entire pattern whose scale has been changed, the dimensional discrepancy (i.e., the discrepancy due to the number of elements) will be large, and the pattern will not be recognized. However, if recognition is executed on discrete pattern elements, the effect of the change in scale will be reduced, and the pattern can be recognized and detected.

[0019] Using smaller regions to mitigate the effects of magnification or reduction will cause the recognition rate to drop because false positives will be detected in images whose pattern elements could have been detected correctly regardless of scale; such false positives can be avoided by tying recognition to arrangement data. This will minimize the drop in recognition rate due to a slight change in scale.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The foregoing and other advantages and features of the invention will become more apparent from the detailed description of preferred embodiments of the invention given below with reference to the accompanying drawings in which:

Figure 1 is a block diagram of an image recognition device according to a preferred embodiment of the present invention;

Figure 2 shows an example of a target pattern (reference pattern) to be recognized;

Figure 3 (a) shows an example of how the specified reference image might be divided into pattern elements (dictionary data);

Figure 3 (b) shows several examples of arrangement data;

Figure 4 shows an example of an input pattern to be compared with the target pattern;

Figure 5 (a) illustrates a target pattern used for image recognition in Figure 5(b);

Figure 5 (b) illustrates the difficulty experienced in the prior art, where the input image data is larger than the target (reference) pattern;

Figure 6 illustrates image recognition in accordance

with a preferred embodiment of the present invention;

Figure 7 shows another example of a target pattern to be recognized;

Figure 8 shows how the pattern in Figure 7 might be divided into pattern elements;

Figure 9 illustrates how recognition processing could be accomplished using the pattern elements shown in Figure 8;

Figure 10 shows a preferred embodiment of an image processing system containing the image processing device of the present invention;

Figure 11 shows the configuration of a system in which the recording medium of the present invention is implemented; and

Figure 12 is a block diagram of the configuration of a system in which the recording medium of the present invention is implemented.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0021] Referring now to the drawings, where like reference numerals designate like elements, there is shown in Figure 1 a device for image recognition using pattern elements. The device of Figure 1 comprises a dictionary generating unit 1 which stores dictionary data concerning the target patterns to be detected. This dictionary data is obtained by dividing the target pattern (reference pattern) into a number of regions and storing each as a pattern element.

[0022] For example, according to a prior art algorithm, the target pattern 5 shown in Figure 2 would be recorded in the dictionary generating unit 1 as a target pattern in its entirety. With the present invention, the target pattern is divided into a number of (here, six) regions, and dictionary data for each region is stored as pattern elements 5a through 5f.

[0023] Using the dictionary data stored in dictionary generating unit 1, element matching unit 2 executes matching processing on the input image. It sends the results of the matching to the next stage, pattern detection unit 3. For the dictionary data associated with the target pattern in Figure 2, the six pattern elements 5a through 5f are read out (i.e., taken out of dictionary generating unit 1), and matching is executed with respect to each element. A determination is made as to whether the target pattern elements can be found in each input image. If they are found, the matching results are sent, together with their position data, to pattern detection unit 3. In this case the data consist of a set indicating which pattern element was found in which location.

[0024] In this embodiment, the location of the element consists of the coordinates of the center of the detected pattern element. In other words, element matching unit 2 also has the capacity to detect this center location. Since the processing by which the input image data is matched against the individual target pattern elements can be the same as that used in prior art devices, we will not provide a detailed explanation of it here.

[0025] Based on the matching results it receives from element matching unit 2 (the data as to the target pattern elements which match each of the input image pattern elements and the position data) and the arrangement data concerning target pattern elements 5a through 5f which it receives from arrangement data generating unit 4, pattern detection unit 3 determines whether the pattern elements in the input image, which match all of the target pattern elements, are in the proper locations. If they are, it concludes that the input image data that was received contains the target pattern, and it outputs the result that the target pattern has been recognized.

[0026] As can be seen in Figure 3 (a), the arrangement data stored in arrangement data generating unit 4 consists of the relative position coordinates which are defined by the center positions a through f of pattern elements 5a through 5f. The pattern shown in Figure 3 (a) is identical to pattern 5, which is to say that it represents the arrangement data for a magnification of 100%. However, the arrangement data in this embodiment is not limited to 100% only. Data for other magnifications are stored as well. As can be seen in Figure 3 (b), arrangement data for a magnification of 115% consists of the relative position coordinates of center points a' through f', and arrangement data for magnification of 95% consists of the relative position coordinates of center points a" through f".

[0027] Arrangement data generating unit 4 outputs a magnification which was previously estimated or inferred from the input image data along with the arrangement data for those elements. The magnification is estimated from the magnification of the object to be recognized. In actuality, a number of magnifications are provided as output sequentially. To infer the magnification based on the input image data, the technique disclosed in Japanese Patent Publication 9-132763 may be applied. If an accurate magnification value can be obtained from the exterior, as in the case of a copier, arrangement data appropriate for the given magnification is provided as output.

[0028] We shall next give a more detailed explanation of this invention while discussing the actual recognition processing. If original pattern or target pattern 5 has the dimensions and shape shown in Figure 2, let us assume that there is an input pattern 6 to be recognized, as shown in Figure 4. Input pattern 6 has been magnified to 115% of the size of the original target pattern 5. With this small difference, there is a real possibil-

ity that a person viewing the input image pattern could mistakenly think it is identical to target pattern 5.

[0029] If a prior art image recognition method is used, the entire target pattern 5 in Figure 2 will be used as a reference. When the target pattern 5, shown by dotted lines in Figure 5 (a), is matched against the actual input pattern 6, the size difference will cause a significant discrepancy (see Figure 5 (b)), the probability of receiving a positive image recognition (the matching value) will be low, and target pattern 5 will not be recognized in the input pattern 6.

[0030] With the current embodiment of the present invention, as can be seen in Figure 6, each of the six target pattern elements 5a through 5f is compared to the corresponding input pattern element individually so that each is treated as a small independent region. The discrepancies caused by the magnification or reduction of the input image will for the most part be limited within a given input pattern element because the comparison is conducted in each region of the pattern elements. This regional comparison can result a sufficient accuracy in the matching process.

[0031] For example, in the example shown in Figure 6, element matching unit 2 will detect all of input pattern elements 6a through 6f and extract the center coordinates (indicated by white circles in the drawing) for each element. It will then transmit these coordinate values along with a descriptive notation (a number) for each element to pattern detection unit 3 as the result of the recognition routine.

[0032] Pattern detection unit 3 compares the coordinate values sequentially with the plurality of reference arrangement data associated with each magnification which it receives from arrangement data generating unit 4. From this comparison, it determines whether the relative positional relationship of the input pattern elements that were detected matches the arrangement data for any of the magnifications, and so determines whether the input and target patterns match. In the example shown in Figure 6, the relationship matches the arrangement data for a magnification of 115%, so it is determined that the detected input pattern matches the target pattern. A result indicating this match is output from pattern detection unit 3.

[0033] Resolution is one of the crucial elements in determining the presence of a pattern element. For example, when each comparison region is reduced for each input pattern element according to this embodiment, but elements 5a through 5f are changed to the higher resolution, then the detection can not be precisely carried out. This is because the total number of pixels in an image will increase or decrease according to the magnification ratio.

[0034] When one region of the image in target pattern 5 contains a square with 100 pixels in it, the input pattern magnified to 115% will have 115 pixels. The magnified input pattern of 115% will increase by 15 pixels. When that same target pattern 5 is divided into ten

equal segments, each segment will contain a square consisting of 10 pixels. So even though the entire input pattern has been magnified to 115% of its original size, each input pattern element will consist of only 11.5 pixels, an increase of only one to two pixels. The input pattern elements can thus be detected in the target pattern elements almost without any effect from the magnification, thus ensuring that both matching and detection can be accomplished with acceptable accuracy.

[0035] However, if the target pattern of the actual dimensions is divided into ten equal regions and the resolution is increased by, for example, a factor of ten, each segment forming a pattern element will be a square containing 100 pixels. In this case, if the entire image is magnified to 115% of its original size, there will be fifteen extra pixels in each segment, and the accuracy of detection will suffer.

[0036] For this reason, the resolution of the pattern elements should be low enough such that no effect is experienced from a slight magnification. The discrepancy due to magnification should be kept within the range of accidental error in the input image. For our purposes, "slight magnification" refers to a low magnification which an ordinary person cannot discriminate or recognize with his naked eye. Magnification ratios large enough to distinguish with the naked eye need not be addressed. If the dimensions of the copy are obviously different from those of the original, so that a counterfeit banknote can easily be distinguished at a glance, there is no need for countermeasures.

[0037] With this sort of low resolution, the recognition rate with respect to individual pattern elements will not be high enough. In other word, patterns which are not pattern elements will mistakenly be recognized. (This is why we cannot lower the resolution of the entire pattern as a whole and match it directly against the entire pattern). This drop in the recognition rate can be offset by recognizing a number of regions (i.e., pattern elements) at the same time and by using arrangement data concerning their relative arrangement to aid in the recognition.

[0038] Figure 7 shows another example of a pattern to be recognized. The pattern 5 shown in Figure 2 consisted of a number of shapes, so it could easily be divided into elements; however, the invention is not limited to this sort of pattern only, but is also applicable for patterns like that shown in Figure 7, which do not lend themselves easily to being divided.

[0039] The pattern shown in Figure 7 is continuous, so it would be difficult to divide it along the shapes in the pattern. It could, however, be divided using the mesh pattern in Figure 8 into twenty-five pattern elements 7a. The black circle in the center of each element 7a marks its center position. If, as is shown in Figure 9, this pattern is enlarged, pattern elements 7a can all be moved slightly away from each other. The corresponding portions of pattern 9 can then be matched against the pattern elements, and the pattern will be recognized

despite the magnification. The image recognition device for this purpose would be configured as in Figure 1.

[0040] The pattern may be divided into elements using schemes other than a mesh. The pattern elements could, for example, be circular, which would make the effect of a change in scale isotropic. However, if the pattern is divided into circular pattern elements which are not overlapped, there will be gaps between the circles. To eliminate these gaps, we can create more elements to overlap the circles and cover these gaps. When overlapping elements are used, the accuracy of matching elements may be affected; however, this is an effective way to deal with a magnified or reduced image, since the overall accuracy will be enhanced. Hexagonal elements, which might be viewed as intermediate between round and square elements, could also be used to create a pattern like a honeycomb. In addition to those mentioned, any number of other shapes could also be used.

[0041] Figure 10 illustrates a preferred embodiment of an image processing system comprising an image processing device in accordance with the present invention. As illustrated in Figure 10, in the image processing system the document is read by a scanner 10, the image input device, and the resulting image data is sent to personal computer 12, the image processing device. Personal computer 12 executes the prescribed processing on the input image data it receives and outputs the processed data to printer 14, the image generating device. Using the data it receives, printer 14 prints an image on the paper and outputs it.

[0042] The processing executed by personal computer 12 might include changing the scale of the image, modifying it, correcting its color, or any of a variety of possible operations. The image could also be stored in any of a variety of recording media instead of being sent directly to printer 14. The processing to enlarge or reduce the image need not be limited to personal computer 12. It could also be executed when scanner 10 reads the image or just before printer 14 outputs it. The image input device need not be a scanner. It could also be a digital camera (either still or video) or any of a variety of devices. The scheme used to input the image need not be limited to the use of an image input device like scanner 10, as described above. A recording medium such as floppy disc or magnetic optical disc could also be used, or the image could be inputted electronically.

[0043] In this embodiment, image recognition device 16 is connected to personal computer 12. Image recognition device 16 has the configuration shown in Figure 1. It receives the input image data from personal computer 12 and executes the specified image recognition routine. If it determines that the image data it is processing contains the target image, it sends personal computer 12 a message indicating that result. When it receives such a message, personal computer 12 interrupts its normal image processing. It may simply stop

processing the image, or it may reduce the resolution, cause the entire image to be a given color (for example, black), or superimpose a letter or mark on the image so that anyone can see at a glance that the bill or document is counterfeit or a copy.

[0044] As is shown by the dotted lines in the Figure 10, the result of recognition may be output either to personal computer 12 or to printer 14. Also, personal computer 12 is not the only possible source of the input image data. The input image data may also originate in scanner 10 or printer 14. In case the input image is received from scanner 10, the result of recognition may be sent directly to scanner 10.

[0045] Personal computer 12 may have application software to execute the actual image processing. Image recognition device 16 may be a discrete device (including a board) which is attached to personal computer 12, or it may consist of application software installed in personal computer 12. In this case, image recognition device 16 would be built into the personal computer 12 shown in Figure 10. In an image processing system, image recognition device 16 could be installed in scanner 10 or printer 14 at the user's discretion.

[0046] In the discussion above, the arrangement data needed to deal with changes in the scale of the image is stored ahead of time in arrangement data generating unit 4 of Figure 1. However, the invention is not limited to this scheme only. Alternatively, arrangement data for 100% of original size could be stored, and data for different magnifications could be generated by enlarging or reducing the image as needed for each image presented. The processing to accomplish this magnification or reduction could be also executed by pattern detection unit 3.

[0047] In the embodiment discussed above, the program system was stored ahead of time in the personal computer 12, which was treated as a single device. However, the invention is not limited to this case only. There could be an application program which caused the computer to execute all the processing routines, and this program could be stored in a given storage medium.

[0048] For example, as is shown in Figures 11 and 12, floppy disk 20 or CD-ROM 21 could be used as the storage medium. The program stored on storage medium 20 or 21 would then be installed in hard drive unit 25, which is connected to (or installed in) personal computer 24 via floppy drive 22 or CD-ROM drive 23. In addition, personal computer 24 will acquire the configuration discussed in the above embodiment.

[0049] In this embodiment of Figure 12, the matching processing executed in element matching unit 2 and pattern detection unit 3 and the program which detects the center positions and determines the matching of the arrangement data could actually be installed in hard drive unit 25. Then when needed, this functionality could be transmitted from hard drive unit 25 to internal memory 26, where processing units 2 and 3 would be

constructed. In this way all the processing could be executed at a high speed. The dictionary data in generating unit 1 and the arrangement data in generating unit 4 could also be realized in hard drive unit 25 or internal memory 26.

[0050] If only a basic set of arrangement data is stored in arrangement data generating unit 4 and data is generated anew for each magnified or reduced image, this generating function may be performed by a program which is installed, like processing units 2 and 3 discussed above, in hard drive unit 25. When needed, this program would be transmitted from hard drive unit 25 to internal memory 26.

[0051] As is discussed above, the image recognition device, recording medium and image processing device according to this invention can recognize an image which has been distorted so that its size and/or shape differ from the original image. This is performed by dividing the image into smaller elements and comparing each input image element with the corresponding element of a target pattern. This approach absorbs the differences in size and shape and thus allows the distorted image to be recognized. In addition to the data for each element of the image, data concerning the relative arrangement of the elements is also considered in the final determination of whether the input image data contains the target image. This use of relative position data effectively minimizes any detrimental effect the scheme might have on recognition rate.

[0052] While certain embodiments of the invention have been described and illustrated above, the invention is not limited to these specific embodiments as numerous modifications, changes and substitutions of equivalent elements can be made without departing from the spirit and scope of the invention. Accordingly, the scope of the present invention is not to be considered as limited by the specifics of the particular structures which have been described and illustrated, but is only limited by the scope of the appended claims.

Claims

1. An image recognition device, comprising:

an element matching means to match a plurality of input pattern elements obtained by dividing an input image into a plurality of regions with the corresponding target pattern elements of a target pattern; and

a pattern detection means to detect relative positions of said plurality of input pattern elements compared with reference arrangement data of said target pattern elements in order to recognize whether said input image includes said target pattern.

2. An image recognition device, comprising:

a dictionary generating unit which stores dictionary data for each pattern element in a target pattern;

an element matching unit, which compares and matches input image pattern data which is provided as input against said dictionary data stored in said dictionary generating unit;

an arrangement data generating unit which stores the position data representing the arrangement of the target pattern elements; and

a pattern detection unit, which based on the output of said element matching unit and said position data from said arrangement data generating unit, determines whether said target pattern can be found in said input image pattern data.

3. The image recognition device of claim 2, wherein said dictionary generating unit comprises a software routine.

4. The image recognition device of claim 2, wherein said element matching unit comprises a software routine.

5. The image recognition device of claim 2, wherein said arrangement data generating unit comprises a software routine.

6. The image recognition device of claim 2, wherein said pattern detection unit comprises a software routine.

7. An image processing device, comprising:

an element matching means to match a plurality of input pattern elements obtained by dividing an input image into a plurality of regions with the corresponding target pattern elements of a target pattern;

a pattern detection means to detect relative positions of said plurality of input pattern elements compared with a reference arrangement data of said target pattern elements in order to recognize whether said input image includes said target pattern; and

a control means to control output of said input image to an output device when said pattern detection means recognizes said input image includes said target pattern.

8. The image processing device of claim 7, wherein

said output device comprises a printer.

9. The image processing device of claim 7 further comprising a scanner to input said input image into said image processing device. 5
10. The image processing device of claim 7 further comprising a digital camera to input said input image into said image processing device. 10
11. The image processing device of claim 7 further comprising a floppy disc to input said input image into said image processing device.
12. The image processing device of claim 7 further comprises a personal computer to facilitate copying of said input image. 15
13. A recording medium for an image recognition method, comprising: 20

an element matching means to match a plurality of input pattern elements obtained by dividing an input image into a plurality of regions with corresponding target pattern elements of a target pattern; and 25

a pattern detection means to detect relative positions of said plurality of input pattern elements compared with a reference arrangement data of said target pattern elements in order to recognize whether said input image includes said target pattern. 30

14. A method of processing an image, said method comprising: 35
- inputting a reference image;
- determining target pattern elements for said reference image by dividing said reference image into a plurality of regions; 40
- determining arrangement data for said target pattern elements; 45
- inputting data for an input image;
- determining input elements for said input image by dividing said input image into said plurality of regions corresponding to said reference image; and 50
- comparing said target pattern elements and said input elements. 55
15. The method of claim 14, wherein said comparing comprises comparing said target pattern elements and said input elements relative position to each

other using said arrangement data.

16. The method of claim 14 further comprising halting the process if said target pattern elements include said input elements based on said comparing.
17. The method of claim 14 further comprising changing the color of a reproduction of said input image if said target pattern elements include said input elements based on said comparing.
18. The method of claim 14 further comprising reducing the resolution of a reproduction of said input image if said target pattern elements include said input elements based on said comparing.
19. The method of claim 14 further comprising superimposing a character on top of a reproduction of said input image if said target pattern elements include said input elements based on said comparing.

FIGURE 1

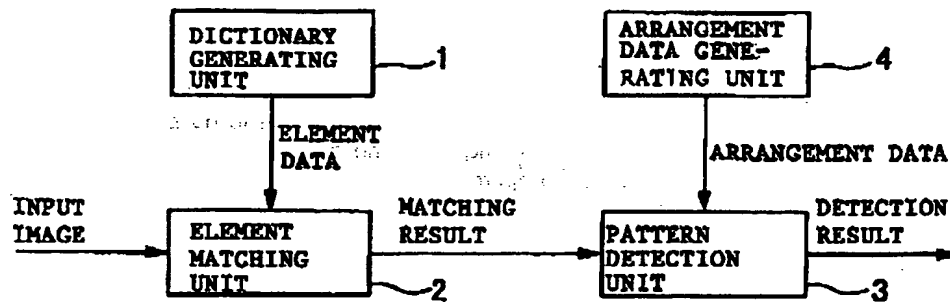


FIGURE 2

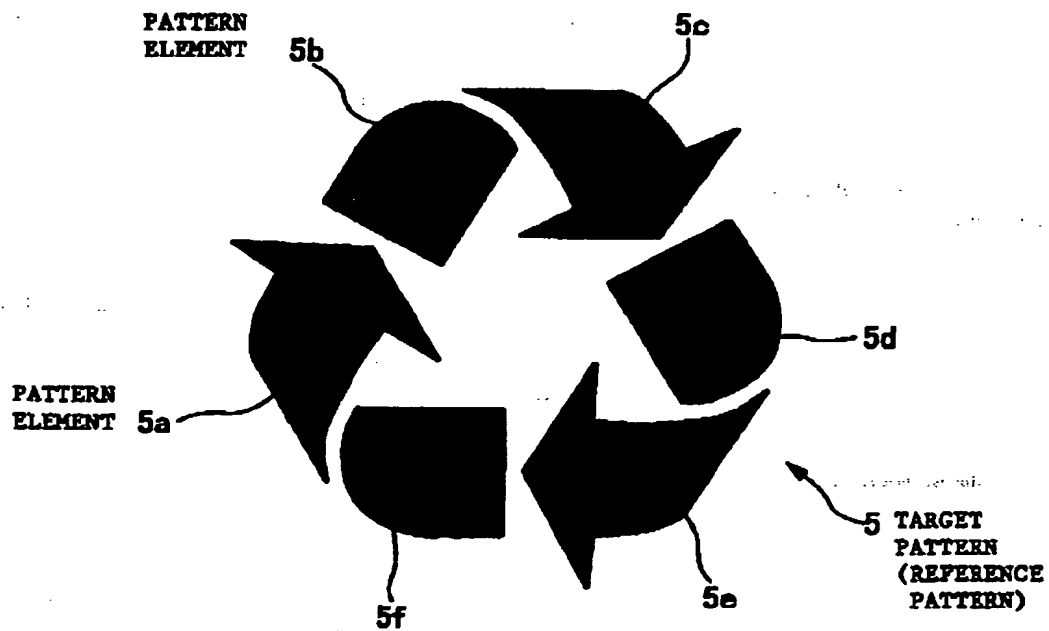


FIGURE 3(a)

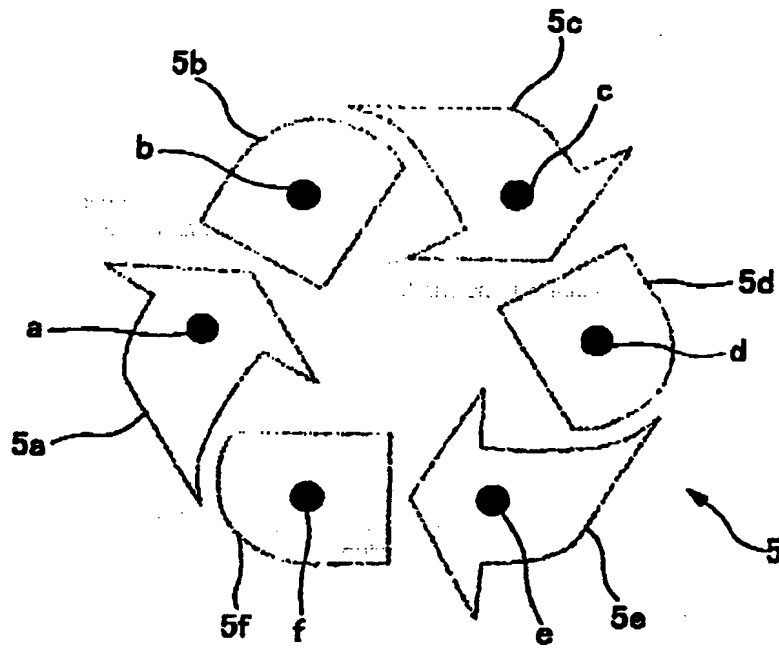


FIGURE 3(b)

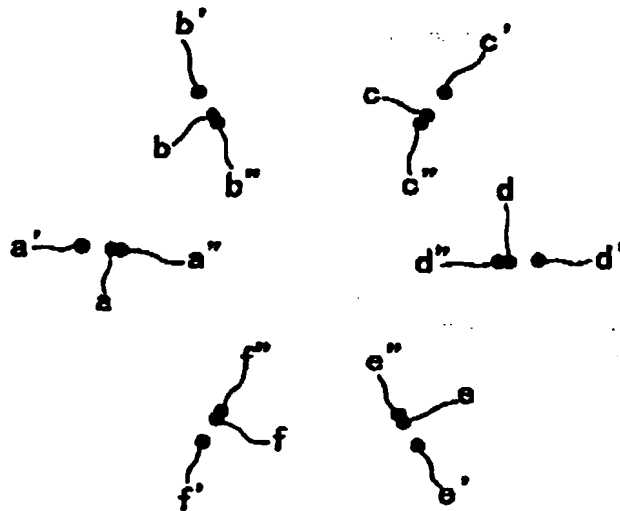


FIGURE 4

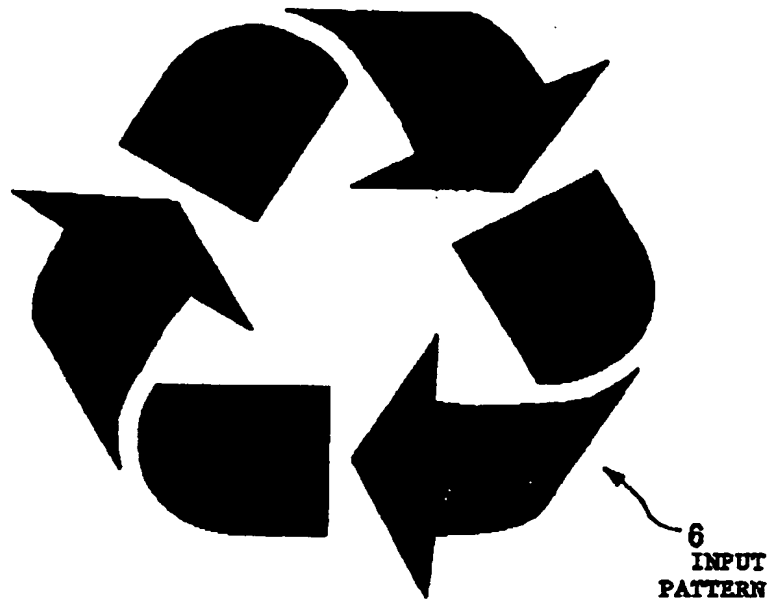


FIGURE 5(a)

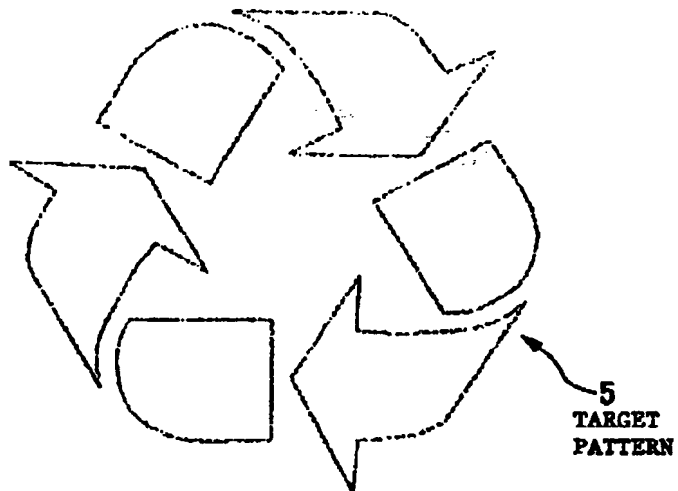


FIGURE 5(b)

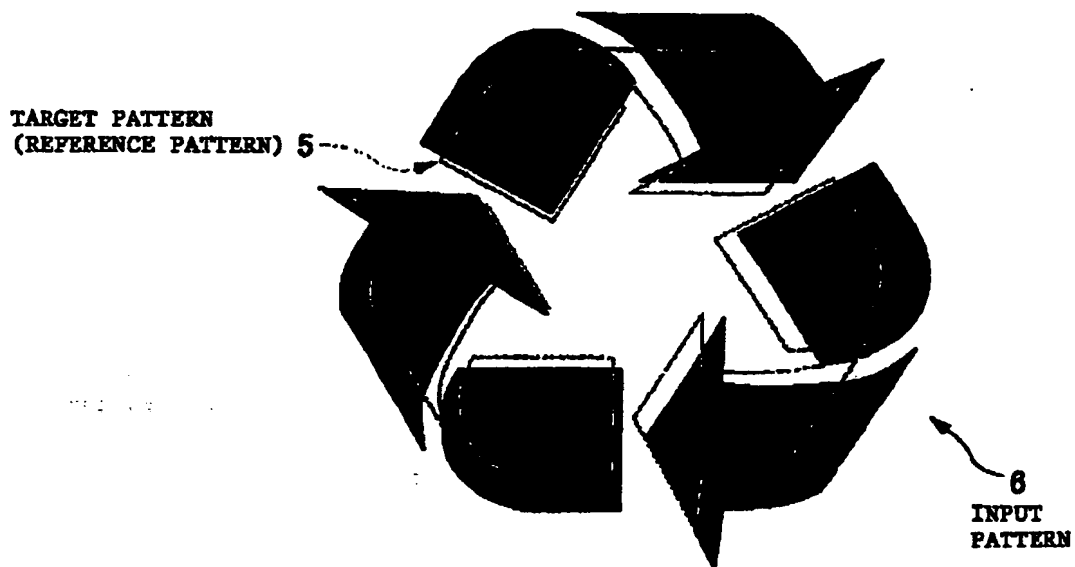


FIGURE 6

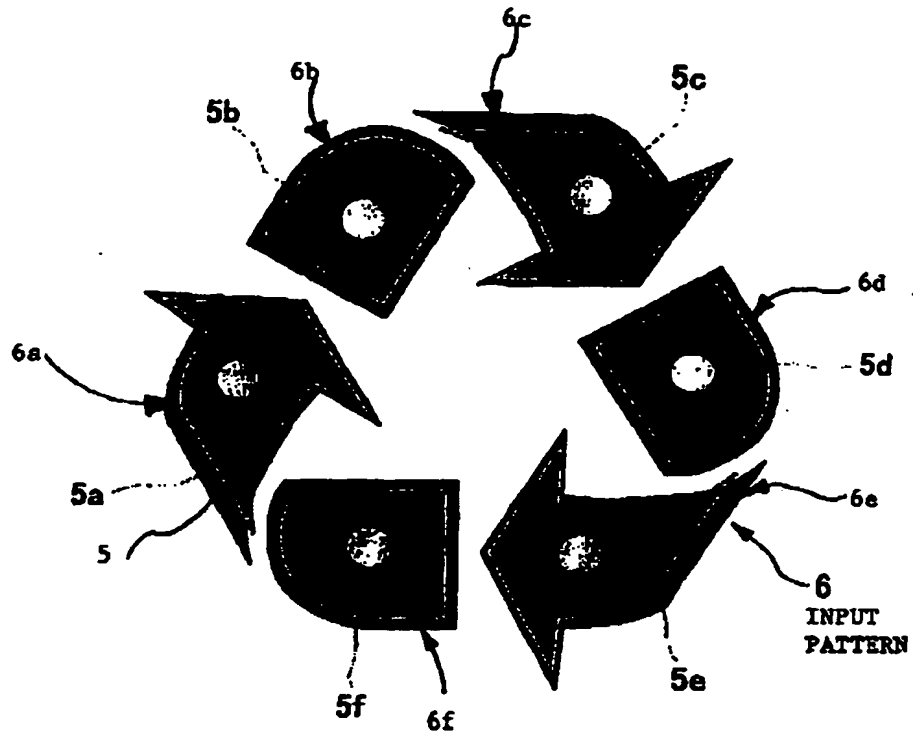


FIGURE 7

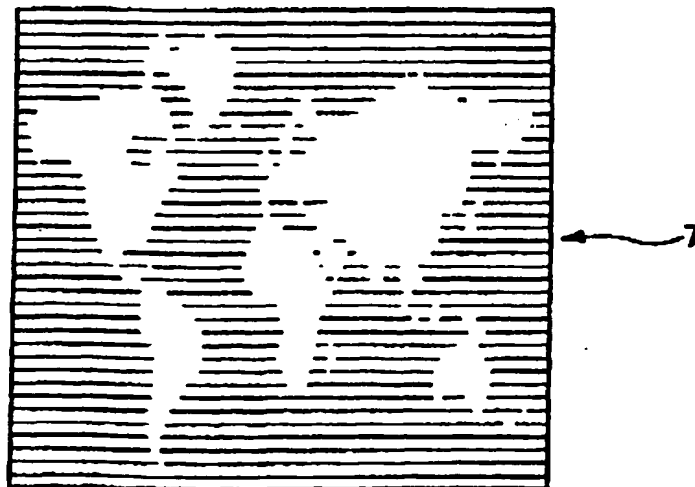


FIGURE 8

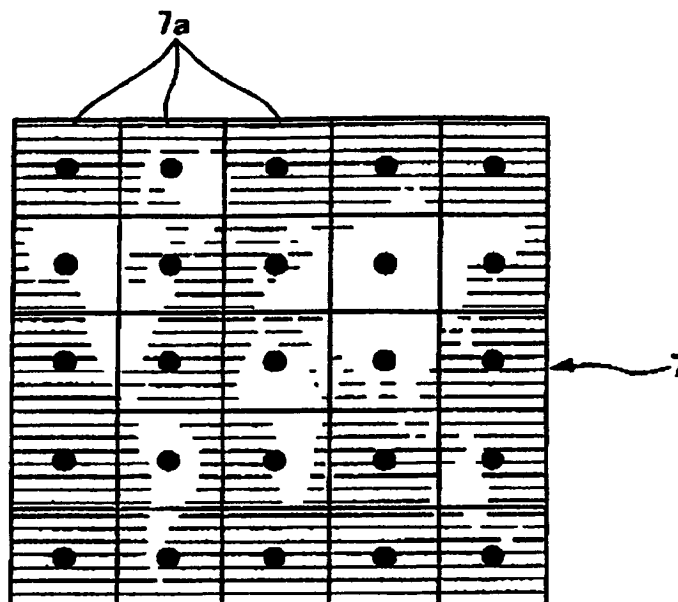


FIGURE 9

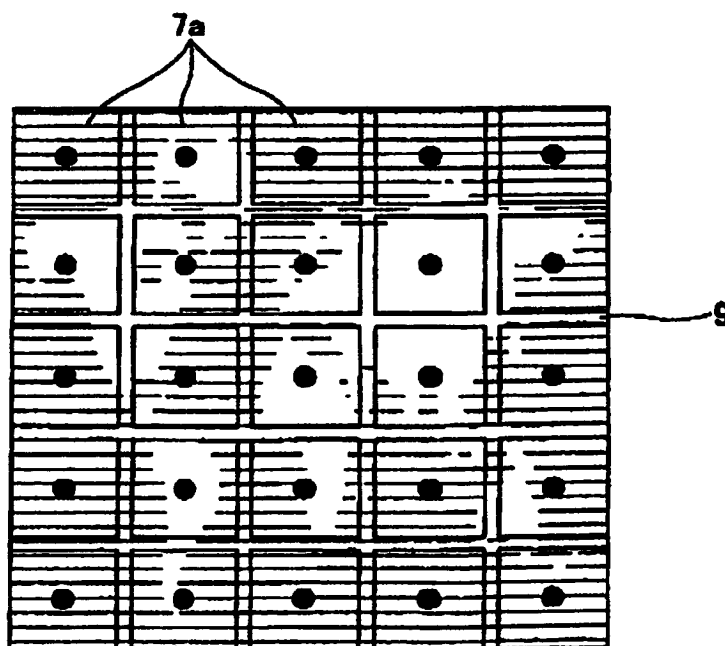


FIGURE 10

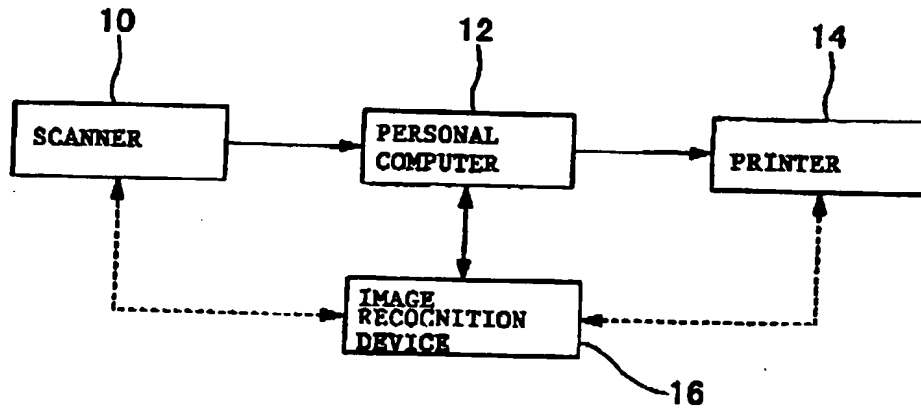


FIGURE 11


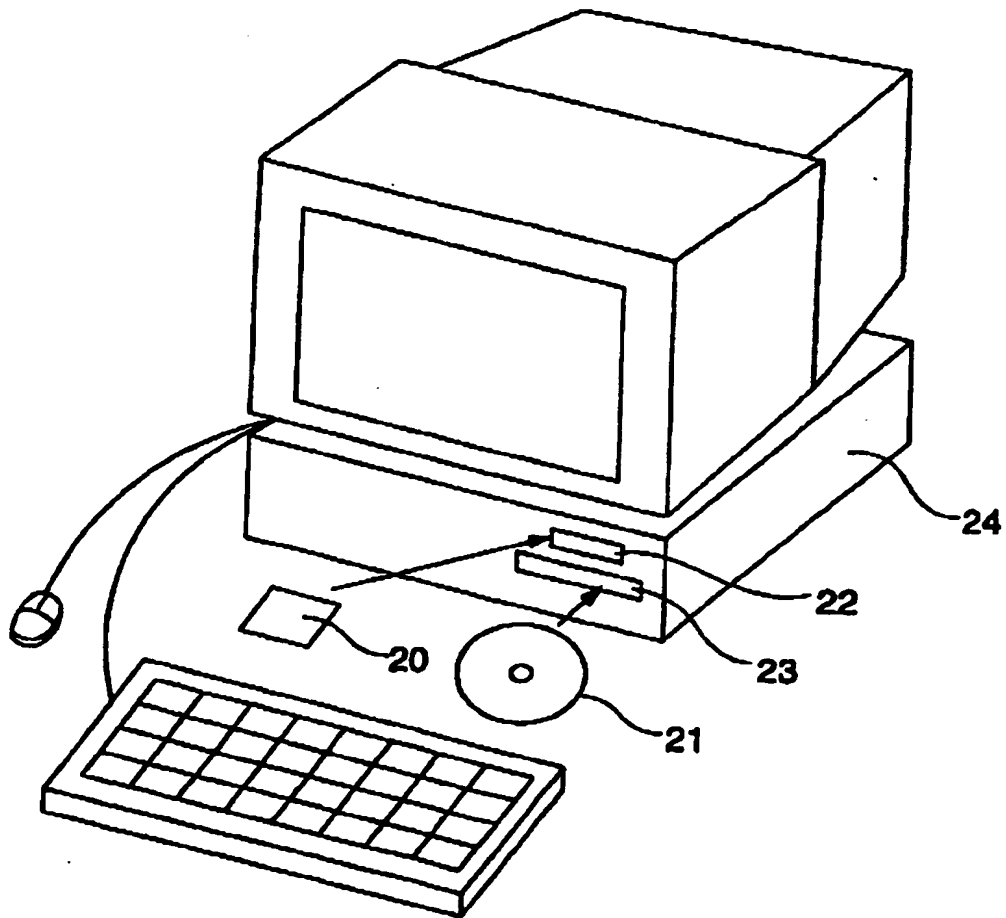


FIGURE 12



(19)

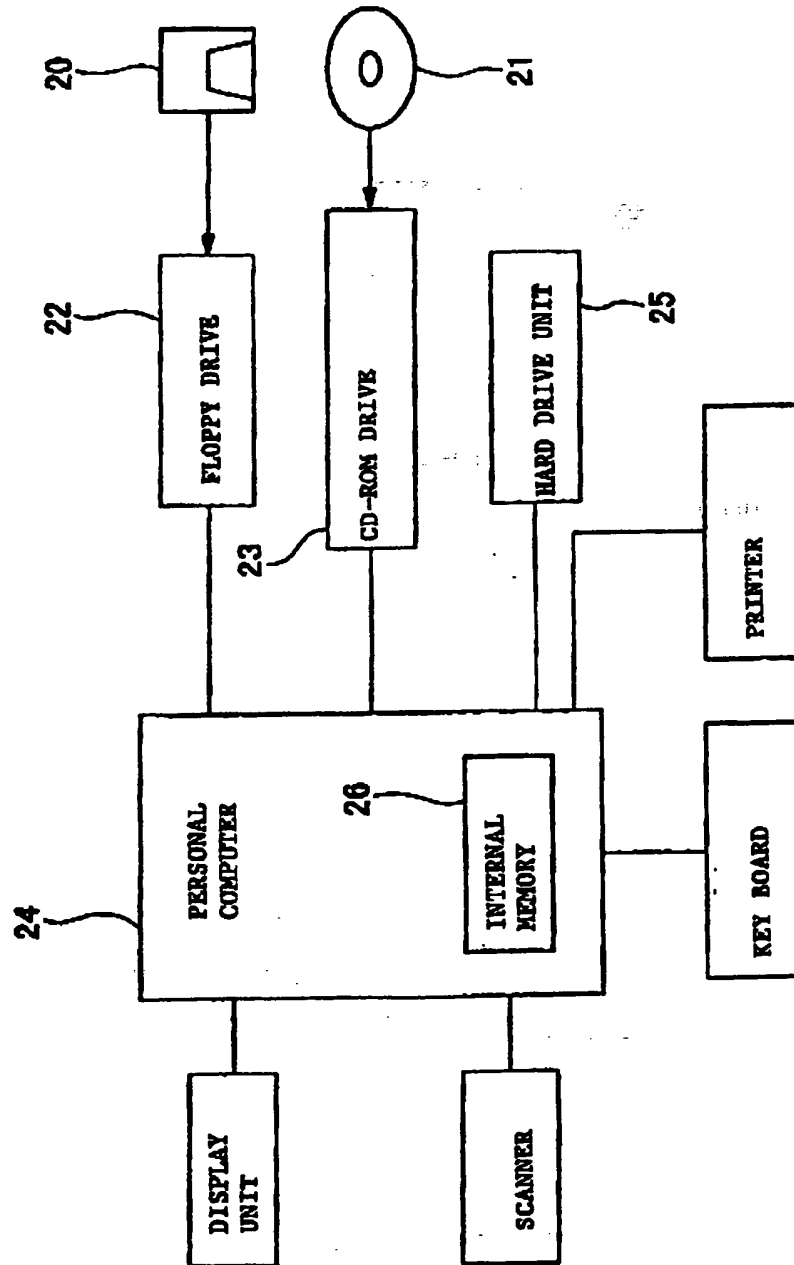

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 018 700 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.10.2003 Bulletin 2003/44

(51) Int Cl.7: **G06K 9/46, G07D 7/20**

(43) Date of publication A2:
12.07.2000 Bulletin 2000/28

(21) Application number: 00100150.2

(22) Date of filing: 10.01.2000

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Hiraishi, Junji
Ukyo-ku, Kyoto 616 (JP)
- Taniguchi, Keitaro
Ukyo-ku, Kyoto 616 (JP)
- Kagatani, Tomoji
Ukyo-ku, Kyoto 616 (JP)

(30) Priority: 08.01.1999 JP 243799

(71) Applicant: **OMRON CORPORATION**
Kyoto-shi, Kyoto 616-8025 (JP)

(74) Representative: **Käck, Jürgen et al**
Kahler Käck Mollekopf
Patentanwälte
Vorderer Anger 239
86899 Landsberg (DE)


(72) Inventors:
• Kakiuchi, Takashi
Ukyo-ku, Kyoto 616 (JP)

(54) An image recognition device using pattern elements

(57) A image recognition device using pattern elements is disclosed. The device comprises an image recognition device, a recording medium, and an image processing device which is be capable of executing recognition processing accurately and evaluating an input image even when the input image data is a different size because the input image has been magnified or reduced. To achieve the objectives, the image recognition

device of this invention has a pattern element recognizing means to recognize the pattern elements obtained by dividing the input image into a plurality of regions which are compared with corresponding target pattern elements, and a pattern detection means to detect the relative position of the pattern elements, which determines whether the pattern elements detected by the aforesaid pattern element recognizing means are arranged properly with respect to each other.

FIGURE 1

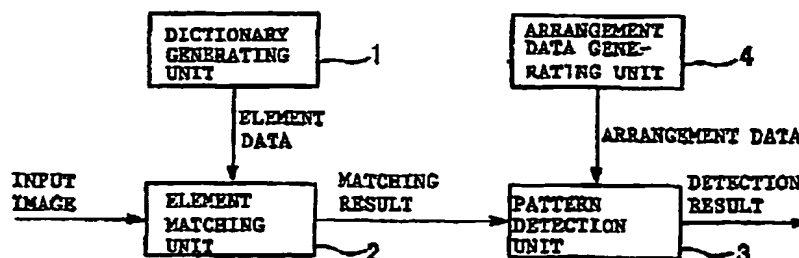

EP 1 018 700 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 10 0150

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 675 (E-1648), 20 December 1994 (1994-12-20) & JP 06 268859 A (SHARP CORP), 22 September 1994 (1994-09-22) * abstract *	1-19	G06K9/46 G07D7/20
P,X	EP 0 932 115 A (SEIKO EPSON CORP) 28 July 1999 (1999-07-28) * abstract * * paragraph [0012] * * paragraph [0019] *	1-16	
A	JP 10 162101 A (HITACHI LTD) 19 June 1998 (1998-06-19) * abstract *	1,2,7, 13,14	
A	US 5 271 068 A (UEDA TORU ET AL) 14 December 1993 (1993-12-14) * abstract; figures 3A-3C,13A-13B *	1,2,7, 13,14	
A	US 5 216 724 A (KAWASE MICHIO ET AL) 1 June 1993 (1993-06-01) * abstract; figures 1,12 * * column 1, line 55 - column 2, line 13 * * column 10, line 26 - column 12, line 35 *	1,2,7, 13,14	TECHNICAL FIELDS SEARCHED (InCL7) G06K G07D G06F H04N
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 4 September 2003	Examiner Müller, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons B: member of the same patent family, corresponding document</p>			

EPO FORM 1503 02 02 (04/02/01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 10 0150

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 06268859	A	22-09-1994	JP 3115736 B2	11-12-2000
EP 0932115	A	28-07-1999	US 6272245 B1	07-08-2001
			EP 0932115 A2	28-07-1999
			JP 3052947 B2	19-06-2000
			JP 11250265 A	17-09-1999
JP 10162101	A	19-06-1998	NONE	
US 5271068	A	14-12-1993	JP 2624558 B2	25-06-1997
			JP 3265986 A	27-11-1991
			JP 2624559 B2	25-06-1997
			JP 3269783 A	02-12-1991
			US 5151951 A	29-09-1992
US 5216724	A	01-06-1993	JP 2210481 A	21-08-1990
			JP 2994655 B2	27-12-1999
			JP 2210591 A	21-08-1990
			JP 2994656 B2	27-12-1999
			JP 2284189 A	21-11-1990
			JP 2749866 B2	13-05-1998
			JP 2288468 A	28-11-1990
			JP 2951964 B2	20-09-1999
			US 5621810 A	15-04-1997
			US 6128401 A	03-10-2000
			US 5426710 A	20-06-1995
			CA 2009699 A1	10-08-1990
			DE 69023782 D1	11-01-1996
			DE 69023782 T2	13-06-1996
			DE 69033327 D1	18-11-1999
			DE 69033327 T2	13-04-2000
			EP 0382549 A2	16-08-1990
			EP 0665477 A2	02-08-1995

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)